Sanitized Copy Approved for Release 2011/05/03 : CIA-RDP78-03300A001900110007-1

SECRET
CONFIDENTIAL

TSS/4022

25X1

November 15, 1957

25X1

Subject: Contract RD-94
Task Order No. 2

25X1

In accordance with Article 2 of the basic contract, there are forwarded herewith two (2) copies of the Monthly Progress Report for October 1957 on Task Order No. 2 of RD-94. This report is UNCLASSIFIED. An additional copy is being held in [redacted] by the project engineer for the use of your personnel while at this location. 25X1

In connection with this monthly progress report the following information is submitted:

Total expenditures to 9-30-57	-	$40,519
Outstanding commitments as of 9-30-57	-	None
Funds remaining as of 9-30-57	-	$11,797

SECRET

Very truly yours

25X1

25X1

Manager
Government Contract Administration

TLA:cmp
f-1:603
Enclosures

25X1

cc: [redacted] on

25X1

CONFIDENTIAL

Sanitized Copy Approved for Release 2011/05/03 : CIA-RDP78-03300A001900110007-1

Sanitized Copy Approved for Release 2011/05/03 : CIA-RDP78-03300A001900110007-1

CONFIDENTIAL

Contract No. RD-94

Audio Noise Reduction Circuits

The object of this project is to develop a noise reduction circuit suitable for use in separating speech intelligence from a signal containing speech and noise when the speech intelligence is masked by the noise. The proposed method involves a principle which has been used successfully to improve the signal-to-noise ratio in music reproducing or transmission systems.[1] The system used for music contains bandpass filters which pass frequencies over a range of an octave or less. These filters are used at the input and output of a non-linear element. The output of the non-linear elements contain the fundamental, and also harmonics and subharmonics of the fundamental. However, since the pass band of the input and output bandpass filters is no greater than an octave, the harmonics and subharmonics are not transmitted by the system. The function of the non-linear element is to reject all noise signals below a given amplitude or threshold level. The threshold levels of the non-linear devices in each channel can be adjusted so that, in the absence of desired signal, the noise is rejected. When the desired signal is greater than the threshold level, the non-linear elements allow the composite signal to pass. Thus, for passages of recorded music, when the music signal is below the noise level in a given frequency channel, the channel is inoperative, and its output is eliminated from the total output. Since the contribution of this channel to the total output would have been only noise, the over-all noise level is reduced. When the music signal in a given channel is greater than the noise, the channel conducts and allows the composite signal to pass. Thus, a channel conducts

1. H.F. Olson, "Electronics," Dec., 1947.

CONFIDENTIAL

Sanitized Copy Approved for Release 2011/05/03 : CIA-RDP78-03300A001900110007-1

Sanitized Copy Approved for Release 2011/05/03 : CIA-RDP78-03300A001900110007-1

CONFIDENTIAL

only when the desired signal is greater than the noise, and rejects when noise alone is present.

In order to apply this method of noise reduction to speech, when the wide band speech signal-to-noise ratio is very low, it was believed necessary to find frequency regions in which the speech amplitude is greater than the noise. Although the long time average spectrum of speech is continuous, and similar in shape to the spectrum of room noise,[2] the short time spectrum of various speech sounds contains regions of maximum energy called speech formants.[3] The assumption that this method of noise reduction should be utilized for speech was based upon the belief that it would be possible to find frequency regions in which the amplitude of the speech formants would be greater than the noise a substantial part of the time.

A study has been made to determine what bandwidths are required in order to obtain speech formant amplitudes above the noise when a wide band speech sample is just intelligible in noise. It is known that for noises with a continuous spectrum it is the noise components in the immediate frequency region of the masked tone which contribute to the masking.[4] When a very narrow band of noise is used to mask a pure tone, the masking increases as the bandwidth is increased until a certain bandwidth is reached. After this, as the bandwidth is increased, the amount of masking remains constant. This bandwidth at which the masking reaches a fixed value is termed the critical bandwidth.[5] Measurements have been made using filters which were

2. H. Fletcher, "Speech and Hearing in Communication," Van Nostrand Co., Inc., New York, 1953 (see Figures 61 and 70).

3. Op.cit. chap. 1.

4. L.L. Beranek, "The Design of Speech Communication Systems," Proc. IRE, Vol. 35, pp. 882, Sept., 1947.

5. N.R. French and J.C. Steinberg, "Factors Governing the Intelligibility of Speech Sounds," Jour. Acoust. Soc. Amer., Vol. 19, Jan., 1947. (See Figure 7).

CONFIDENTIAL

Sanitized Copy Approved for Release 2011/05/03 : CIA-RDP78-03300A001900110007-1

Sanitized Copy Approved for Release 2011/05/03 : CIA-RDP78-03300A001900110007-1

both narrower and wider than the critical bandwidth. Both pure tones and speech mixed with continuous spectrum type noises have been studied. The results of this study show that, for the narrowest permissible bands which can be used to pass speech formants, the number of times the speech formant amplitude in a given band exceeds the noise is small. Also, in these bands, the speech amplitude is never considerably greater than the noise. Since very narrow bandwidths are required to reduce the noise below the signal, the number of bands required to cover the speech spectrum is quite large. There was no satisfactory way of evaluating the effect upon speech intelligence of small contributions from many narrow bands without building a many channeled circuit and evaluating it. A complete multi-channel system has been developed in order to determine the effectiveness of this method of improving speech intelligibility in noise. The multi-channel system developed contains 110 channels covering the frequency range from 170 to 3200 cps. The bandwidth and the threshold level of each channel is adjustable. The 110 channels are arranged on 11 chassis with 10 channels on each chassis.

During October the design of a simple volume compressor for use on each of the 11 chassis was completed. One of these volume compressors has been added to each of the 11 chassis. The circuits have all been tested and perform satisfactorily. The input-output characteristic of a typical circuit is shown in Figure 1. The circuit diagram of the volume compressor is shown in Figure 2.

Construction of the 11 band pass filters is being continued in the model shop. The filters for the first 3 chassis have been delivered and are being installed on the chassis.

25X1

November 4, 1957

Sanitized Copy Approved for Release 2011/05/03 : CIA-RDP78-03300A001900110007-1

Sanitized Copy Approved for Release 2011/05/03 : CIA-RDP78-03300A001900110007-1

CONFIDENTIAL

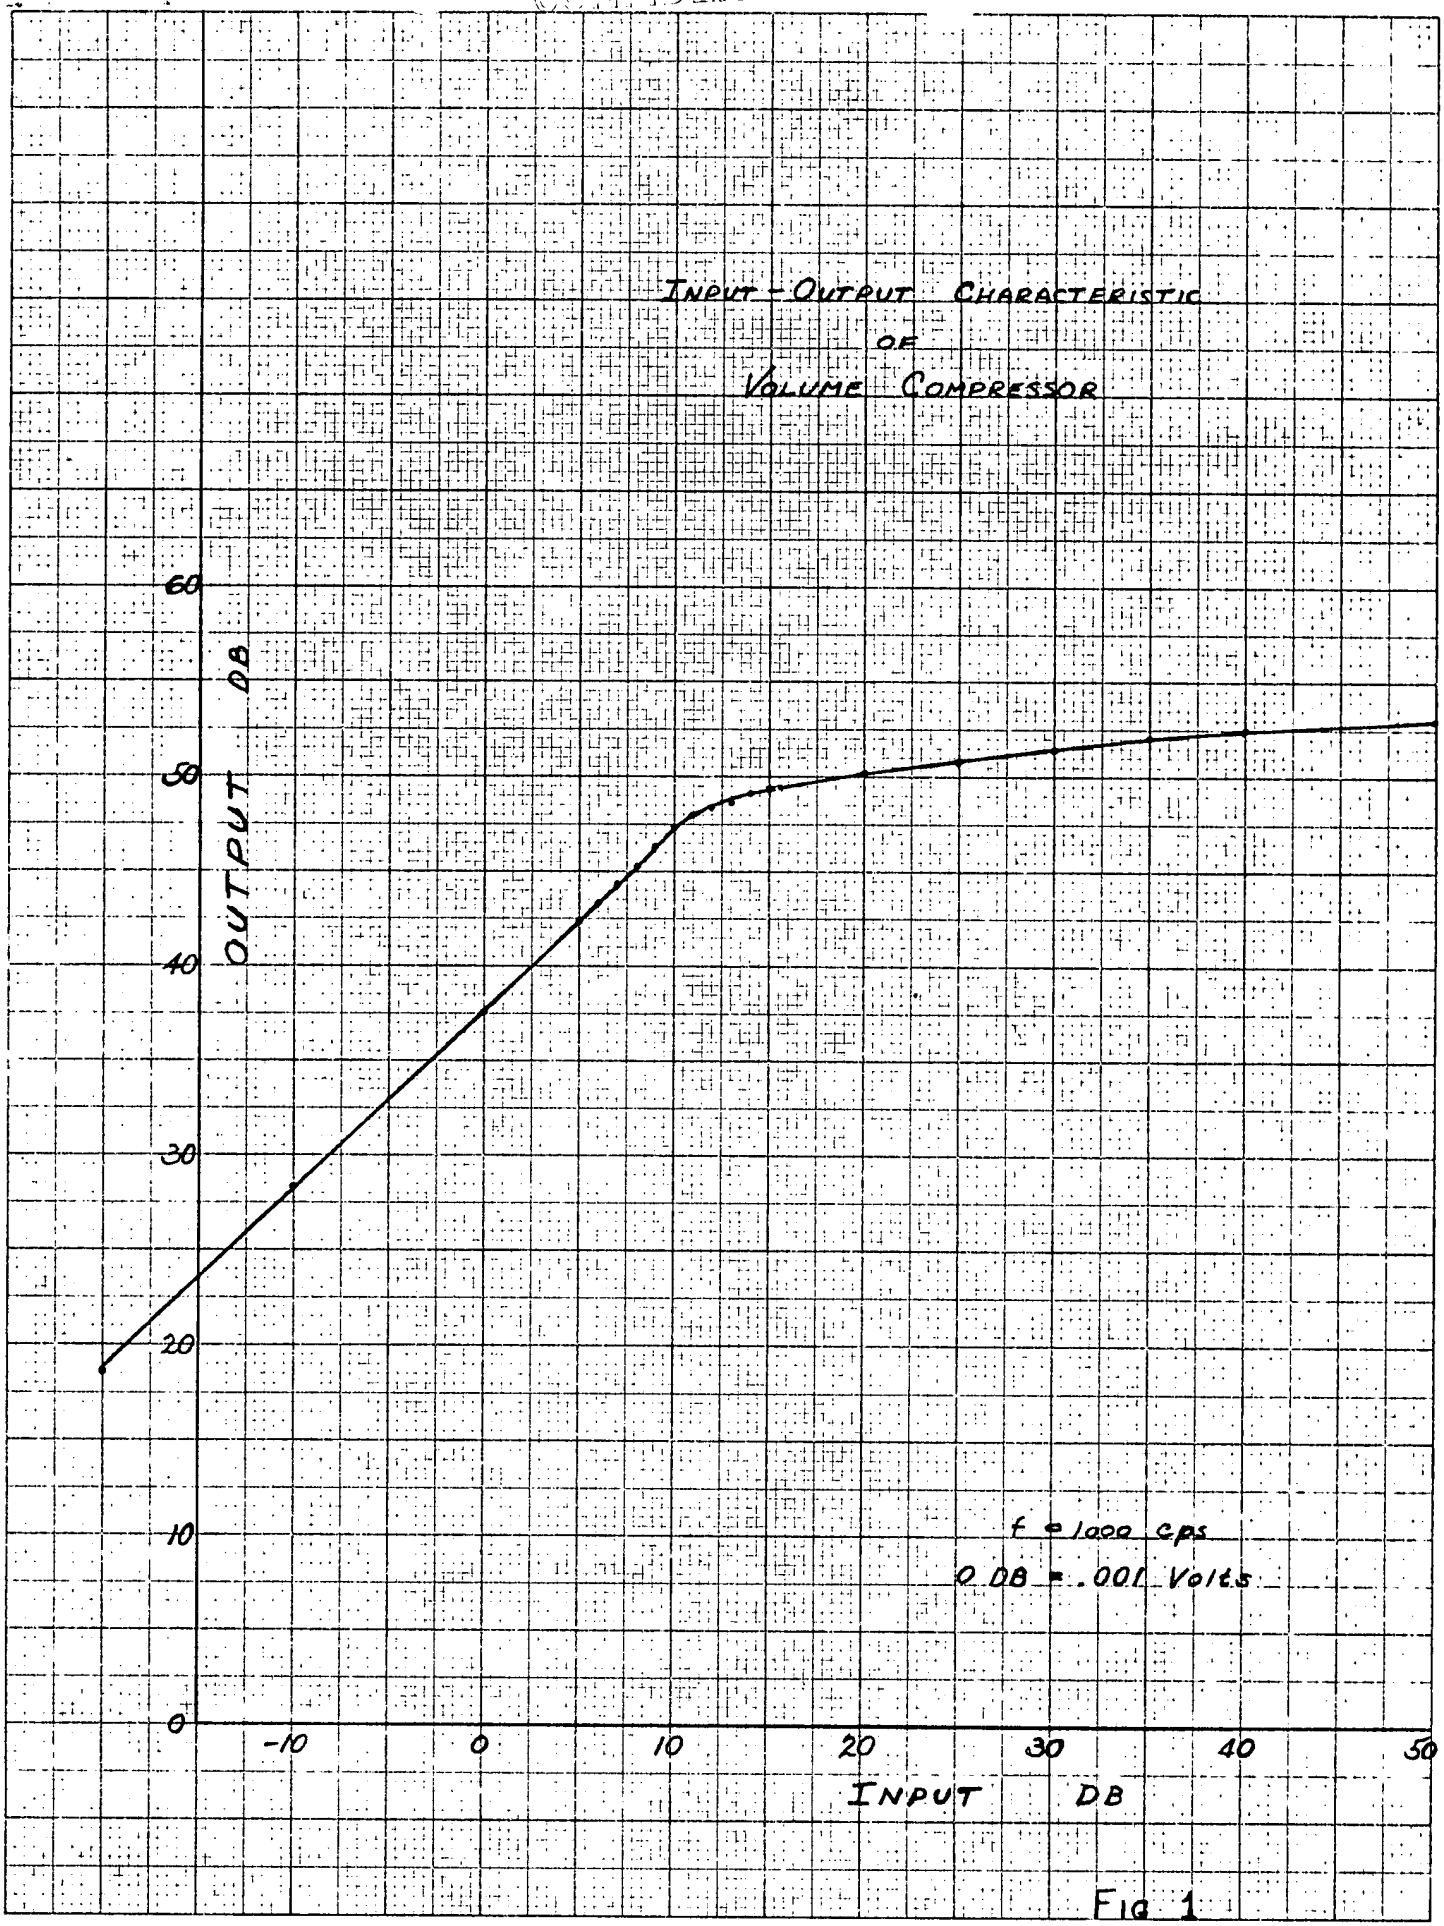

FIG 1

359-12 KEUFFEL & ESSER CO.

CONFIDENTIAL

Sanitized Copy Approved for Release 2011/05/03 : CIA-RDP78-03300A001900110007-1

Sanitized Copy Approved for Release 2011/05/03 : CIA-RDP78-03300A001900110007-1

CONFIDENTIAL

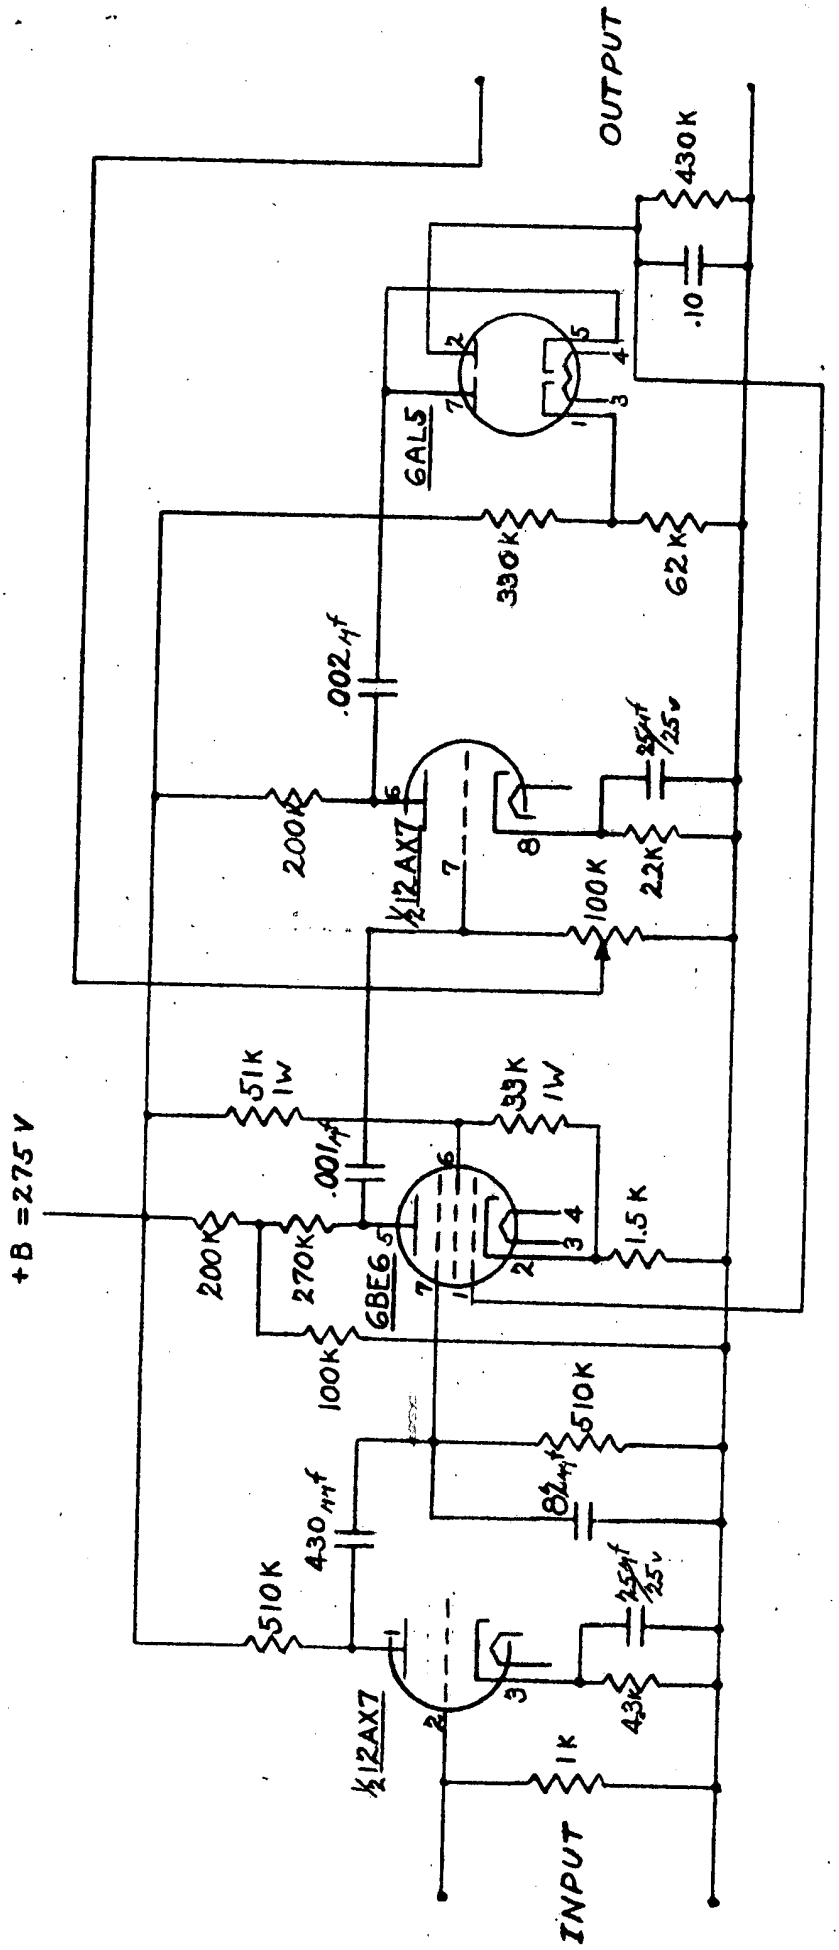

FIG. 2 VOLUME COMPRESSION CIRCUIT DIAGRAM

CONFIDENTIAL

Sanitized Copy Approved for Release 2011/05/03 : CIA-RDP78-03300A001900110007-1